

QS



Giunti e innesti per raffreddamento stampi



Couplings and plugs for mould cooling



Kupplungen für die Formkühlung



Coupleurs et embouts pour le refroidissement des moules



Enchufes y adaptadores para refrigeración de moldes

QS40S

NEW



pag. 25

QS20S

NEW



pag. 25

QS10S

NEW



pag. 26

QS45S

NEW



pag. 26

QS90S

NEW



pag. 26

QS45ST

NEW



pag. 26

QS90ST

NEW



pag. 26

QE40SD

NEW



pag. 26

QE20SD

NEW



pag. 26

QE10SD

NEW



pag. 26

QE45SD

NEW



pag. 26

QE90SD

NEW



pag. 27

QE45SDT

NEW



pag. 27

QE90SDT

NEW



pag. 27

QS40D

NEW



pag. 27

QS20D

NEW



pag. 27

QS10D

NEW



pag. 27

QS45D

NEW



pag. 27

QS90D

NEW



pag. 27

QS45DT

NEW



pag. 27

QS90DT

NEW



pag. 28

QS60

NEW



pag. 28

QS70

NEW



pag. 28

QS90

NEW



pag. 28

QS60-X

NEW



pag. 28

QD60

NEW



pag. 28

QD70

NEW



pag. 28

QL69

NEW



pag. 28



Dati tecnici di Giunti e innesti per raffreddamento stampi



Couplings and plugs for mould cooling technical data



Technischen Daten der Kupplungen für die Formkühlung



Données techniques des Coupleurs et embouts pour le refroidissement des moules



Datos técnicos de los Enchufes y adaptadores para refrigeración de moldes



Caratteristiche principali

1. Gamma completa 1/8 - 1/2"
2. Filettatura BSPP cilindrica UNI-ISO228
4. Vasta gamma
5. Robustezza meccanica



Principales caractéristiques

1. Gamme complète 1/8 - 1/2"
2. Filetage cylindrique BSPP UNI-ISO228
4. Large gamme
5. Robustesse mécanique



Main features

1. Full range 1/8 - 1/2"
2. BSPP cylindrical thread UNI-ISO228
4. Wide range
5. Mechanical robustness



Características principales

1. Rango completo 1/8 - 1/2"
2. Rosca cilíndrica BSPP UNI-ISO228
4. Amplia gama
5. Robustez mecánica



Hauptmerkmale

1. Voller Bereich 1/8 - 1/2"
2. BSPP zylindrisches Gewinde UNI-ISO228
4. Breite Palette
5. Mechanische Robustheit



Applicazioni

1. Settore biomedicale
2. Settore farmaceutico
3. Settore alimentare



Applications

1. Secteur biomédical
2. Secteur pharmaceutique
3. Secteur alimentaire



Applications

1. Biomedical sector
2. Pharmaceutical sector
3. Food sector



Aplicaciones

1. Sector biomédico
2. Sector farmacéutico
3. Sector alimentario



Anwendungen

1. Biomedizinischer Sektor
2. Pharmazeutischer Sektor
3. Lebensmittelsektor

• QS40S - QS20S - QS10S - QS45S - QS90S - QS45ST - QS90ST

 Pressione e temperatura	 Pressure and Temperature	 Druck und Temperatur	 Pression et Température	 Presión y Temperatura
Pressione: 12 Bar	Pressure: 12 Bar	Druck: 12 Bar	Pression: 12 bar	Presión: 12 Bar
Temperatura: +180°C (max 200°C per brevi periodi)	Temperature: + 356°F (max. 392°F for short periods)	Temperatur: +180°C (max. 200°C für kurze Zeit)	Température: +180°C (max. 200°C pour de courtes périodes)	Temperatura: +180°C (máx. 200°C durante periodos cortos)

 Materiali	 Materials	 Werkstoffen	 Matériels	 Materiales
Corpo: Ottone	Body: Brass	Körper: Messing	Corps: Laiton	Cuerpo: Latón
Ghiera: Alluminio anodizzato	Ad justing collar: Anodised aluminium	Zwinge: Eloxiertes Aluminium	Virole: Aluminium anodisé	Contera: Aluminio anodizado
Sfere: Acciaio INOX AISI304	Balls: Stainless Steel AISI304	Kugeln: Edelstahl AISI304	Sphères: Acier Inoxydable AISI304	Esferas: Acero Inoxidable AISI304
Molle: Acciaio INOX AISI302	Springs: Stainless Steel AISI302	Feder: Edelstahl AISI302	Ressort: Acier Inoxydable AISI302	Muelle: Acero Inoxidable AISI302
Guarnizione: FKM (VITON®)	Gasket: FKM (VITON®)	Dichtung: FKM (VITON®)	FKM (VITON®)	Junta: FKM (VITON®)

• QE40SD - QE20SD - QE10SD - QE45SD - QE90SD - QE45SDT - QE90SDT

 Pressione e temperatura	 Pressure and Temperature	 Druck und Temperatur	 Pression et Température	 Presión y Temperatura
Pressione: 12 Bar	Pressure: 12 Bar	Druck: 12 Bar	Pression: 12 bar	Presión: 12 Bar
Temperatura: +70°C (max 80°C per brevi periodi)	Temperature: + 158°F (max. 176°F for short periods)	Temperatur: +70°C (max. 80°C für kurze Zeit)	Température: +70°C (max. 80°C pour de courtes périodes)	Temperatura: +70°C (máx. 80°C durante periodos cortos)

 Materiali	 Materials	 Werkstoffen	 Matériels	 Materiales
Corpo: Metallo	Body: Metal	Körper: Metall	Corps: Métal	Cuerpo: Metal
Ghiera: Alluminio anodizzato	Ad justing collar: Anodised aluminium	Zwinge: Eloxiertes Aluminium	Virole: Aluminium anodisé	Contera: Aluminio anodizado
Sfere: Acciaio temprato	Balls: Hardened steel	Kugeln: Gehärteter Stahl	Sphères: Acier trempé	Esferas: Acero endurecido
Molle: Acciaio da molle	Springs: Spring steel	Feder: Federstahl	Ressort: Acier à ressort	Muelle: Acero para muelles
Guarnizione: NBR	Gasket: NBR	Dichtung: NBR	FKM (VITON®) NBR	Junta: NBR


 **Profili compatibili**
 **Profils compatibles**

 **Compatible profiles**
 **Perfiles compatibles**


 **Kompatible Profile**

• STANDARD TYPE: QS60 - QS70 - QS90 - QS60-X


• DME TYPE: QD60 - QD70




STANDARD TYPE 6



STANDARD TYPE 9




DME TYPE 6



DME TYPE 9

TYPE A

TYPE B

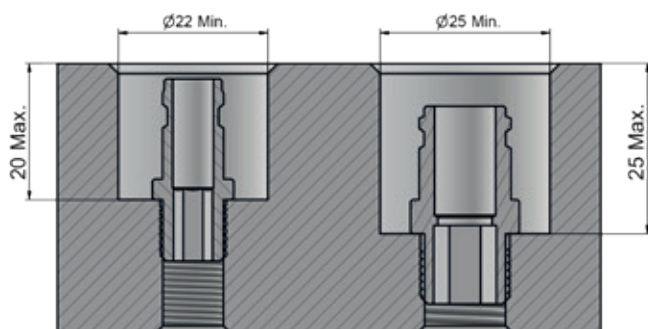


Lamatura stampi - Mould lamination - Formkaschierung - Stratification du moule - Laminado de moldes

STANDARD TYPE 6	TYPE A
STANDARD TYPE 9	TYPE B
DME TYPE 6	TYPE A
DME TYPE 9	TYPE B

QS 40S

NEW

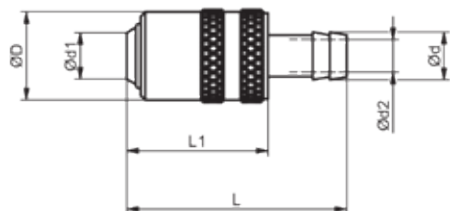

Giunto SAFETY diritto con tubo compatibilità standard

SAFETY straight coupling with standard compatibility tube

SAFETY gerade Kupplung mit Standard-Kompatibilitätsrohr


SAFETY couplage avec tube de compatibilité standard

Enchufe recto SAFETY con tubo de compatibilidad estándar

CODICE/CODE	MODEL	D	d1	d2	d	L1	L	PEZZI/PIECES
QS40S0611	TYPE 6	19	9	7	10,3	17	47,5	1
QS40S0913	TYPE 9	25	13,5	10	14	24,5	59	1

QS 20S

NEW

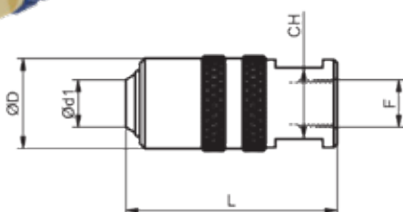

Giunto SAFETY filettato femmina compatibilità standard

SAFETY female threaded coupling standard compatibility

SAFETY Innengewindekupplung Standardkompatibilität


SAFETY couplage fileté femelle compatibilité standard

Enchufe SAFETY roscado hembra compatibilidad estándar

CODICE/CODE	MODEL	F	D	d1	L	CH	PEZZI/PIECES
QS20S0618	TYPE 6	G1/8	19	9	44,5	15	1
QS20S0614	TYPE 6	G1/4	19	9	44,5	15	1
QS20S0914	TYPE 9	G1/4	25	13,5	48,5	19	1
QS20S0938	TYPE 9	G3/8	25	13,5	48,5	19	1

QS 10S

NEW

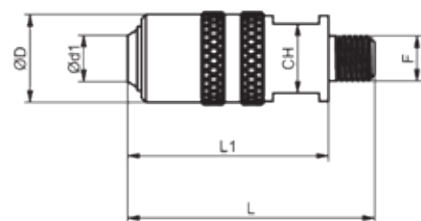

Giunto SAFETY filettato maschio compatibilità standard

SAFETY male threaded coupling standard compatibility

SAFETY Außengewindekupplung Standardkompatibilität


SAFETY couplage fileté mâle compatibilité standard

Enchufe SAFETY roscado macho compatibilidad estándar

CODICE/CODE	MODEL	F	D	d1	L1	L	CH	PEZZI/PIECES
QS10S0618	TYPE 6	G1/8	19	9	44,5	47,5	15	1
QS10S0614	TYPE 6	G1/4	19	9	44,5	47,5	15	1
QS10S0938	TYPE 9	G1/4	25	13,5	48,5	56	19	1
QS10S0912	TYPE 9	G1/2	25	13,5	48,5	56	19	1

QS 45S

NEW

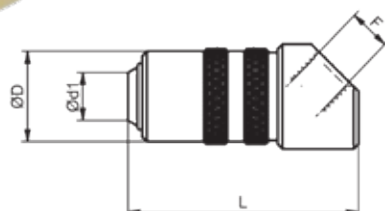

Giunto SAFETY filettato femmina a 45° compatibilità standard

SAFETY 45° female threaded coupling standard compatibility

SAFETY 45°-Innengewindekupplung Standardkompatibilität


SAFETY couplage fileté femelle à 45° compatibilité standard

Enchufe SAFETY roscado hembra de 45° compatibilidad estándar

CODICE/CODE	MODEL	F	D	d1	L	PEZZI/PIECES
QS45S0618	TYPE 6	G1/8	19	6	48,5	1
QS45S0914	TYPE 9	G1/4	25	9	51	1

QS 90S

NEW

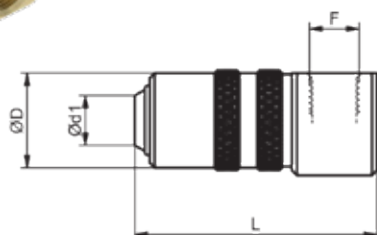

Giunto SAFETY filettato femmina a 90° compatibilità standard

SAFETY 90° female threaded coupling standard compatibility

SAFETY 90°-Innengewindekupplung Standardkompatibilität


SAFETY couplage fileté femelle à 90° compatibilité standard

Enchufe SAFETY roscado hembra de 90° compatibilidad estándar

CODICE/CODE	MODEL	F	D	d1	L	PEZZI/PIECES
QS90S0618	TYPE 6	G1/8	19	6	48,5	1
QS90S0914	TYPE 9	G1/4	25	9	51	1

QS 45ST

NEW

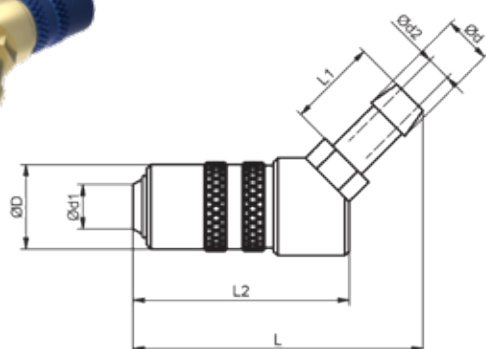

Giunto SAFETY con tubo a 45° compatibilità standard

SAFETY coupling with 45° tube standard compatibility

SAFETY-Kupplung mit 45°-Rohr Standardkompatibilität


SAFETY couplage avec tube à 45° compatibilité standard

Enchufe SAFETY con tubo de 45° compatibilidad estándar

CODICE/CODE	MODEL	D	d1	L	L2	d	d2	L1	PEZZI/PIECES
QS45ST0611	TYPE 6	19	9	65	48,5	10,7	6	20	1
QS45ST0913	TYPE 9	25	13,5	68	54	14	10	24,5	1

QS 90ST

NEW

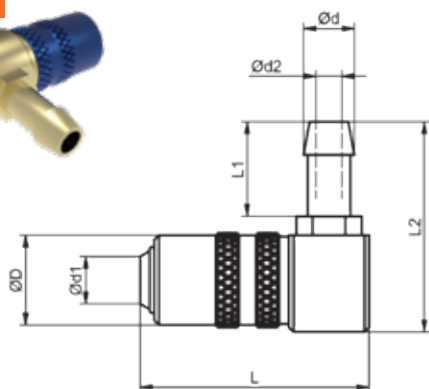

Giunto SAFETY con tubo a 90° compatibilità standard

SAFETY coupling with 90° tube standard compatibility

SAFETY-Kupplung mit 90°-Rohr Standardkompatibilität


SAFETY couplage avec tube à 90° compatibilité standard

Enchufe SAFETY con tubo de 90° compatibilidad estándar

CODICE/CODE	MODEL	D	d1	L	d	d2	L1	L2	PEZZI/PIECES
QS90ST0611	TYPE 6	19	9	48,5	10,7	6	20	44,5	1
QS90ST0913	TYPE 9	25	13,5	54	14	10	24,5	56	1

QE 40SD

NEW

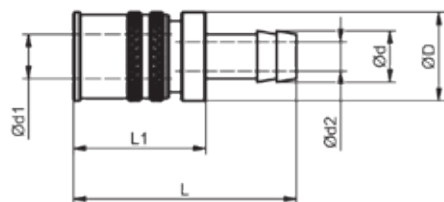


Giunto ECO diritto con tubo compatibilità standard

- ECO straight coupling with standard compatibility tube
- ECO gerade Kupplung mit Standard-Kompatibilitätsrohr
- ECO couplage avec tube de compatibilité standard
- Enchufe recto ECO con tubo de compatibilidad estándar

CODICE/CODE	MODEL	D	d1	d2	d	L1	L	PEZZI/PIECES
QE40SD0611	TYPE 6	19	9	7	10,3	17	47,5	1
QE40SD0913	TYPE 9	25	13,5	10	14	24,5	59	1

QE 20SD

NEW

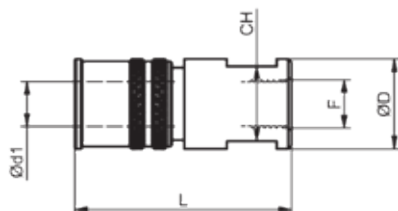


Giunto ECO filettato femmina compatibilità standard

- ECO female threaded coupling standard compatibility
- ECO Innengewindekupplung Standardkompatibilität
- ECO couplage fileté femelle compatibilité standard
- Enchufe ECO roscado hembra compatibilidad estándar

CODICE/CODE	MODEL	F	D	d1	L	CH	PEZZI/PIECES
QE20SD0618	TYPE 6	G1/8	19	9,5	44,5	15	1
QE20SD0614	TYPE 6	G1/4	19	9,5	44,5	15	1
QE20SD0914	TYPE 9	G1/4	25	13,5	48,5	19	1
QE20SD0938	TYPE 9	G3/8	25	13,5	48,5	19	1

QE 10SD

NEW

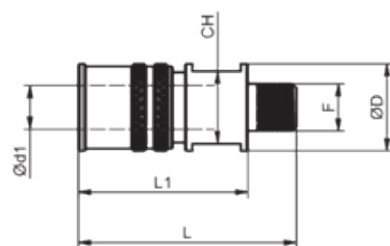


Giunto ECO filettato maschio compatibilità standard

- ECO male threaded coupling standard compatibility
- ECO Außengewindekupplung Standardkompatibilität
- ECO couplage fileté mâle compatibilité standard
- Enchufe ECO roscado macho compatibilidad estándar

CODICE/CODE	MODEL	F	D	d1	L1	L	CH	PEZZI/PIECES
QE10SD0618	TYPE 6	G1/8	19	9,5	44,5	47,5	15	1
QE10SD0614	TYPE 6	G1/4	19	9,5	44,5	47,5	15	1
QE10SD0914	TYPE 9	G1/4	25	13,5	48,5	56	19	1
QE10SD0938	TYPE 9	G1/2	25	13,5	48,5	56	19	1

QE 45SD

NEW

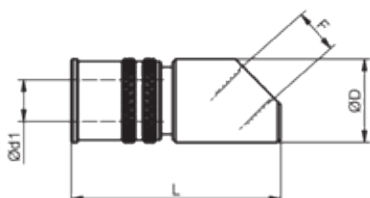


Giunto ECO filettato femmina a 45° compatibilità standard

- ECO 45° female threaded coupling standard compatibility
- ECO 45°-Innengewindekupplung Standardkompatibilität
- ECO couplage fileté femelle à 45° compatibilité standard
- Enchufe ECO roscado hembra de 45° compatibilidad estándar

CODICE/CODE	MODEL	F	D	d1	L	PEZZI/PIECES
QE45SD0618	TYPE 6	G1/8	19	9,5	48,5	1
QE45SD0914	TYPE 9	G1/4	25	13,5	51	1

QE 90SD

NEW

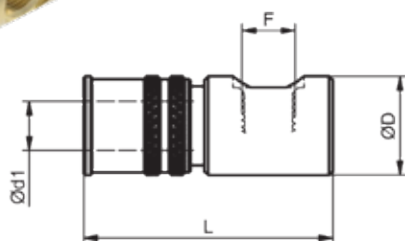


Giunto ECO filettato femmina a 90° compatibilità standard

- ECO 90° female threaded coupling standard compatibility
- ECO 90°-Innengewindekupplung Standardkompatibilität
- ECO couplage fileté femelle à 90° compatibilité standard
- Enchufe ECO roscado hembra de 90° compatibilidad estándar

CODICE/CODE	MODEL	F	D	d1	L	PEZZI/PIECES
QE90SD0618	TYPE 6	G1/8	19	9,5	48,5	1
QE90SD0914	TYPE 9	G1/4	25	13,5	51	1

QE 45SDT

NEW

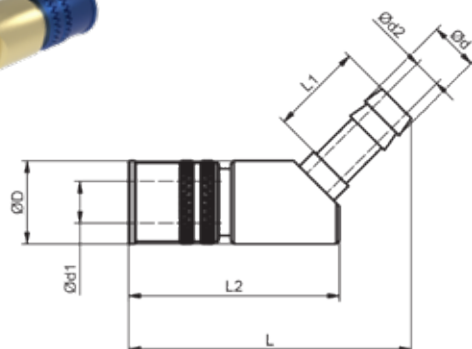


Giunto ECO con tubo a 45° compatibilità standard

- ECO coupling with 45° tube standard compatibility
- ECO-Kupplung mit 45°-Rohr Standardkompatibilität
- ECO couplage avec tube à 45° compatibilité standard
- Enchufe ECO con tubo de 45° compatibilidad estándar

CODICE/CODE	MODEL	D	d1	L	L2	d	d2	L1	PEZZI/PIECES
QE45SDT0611	TYPE 6	19	9,5	65	48,5	10,7	6	20	1
QE45SDT0913	TYPE 9	25	13,5	68	54	14	10	24,5	1

QE 90SDT

NEW

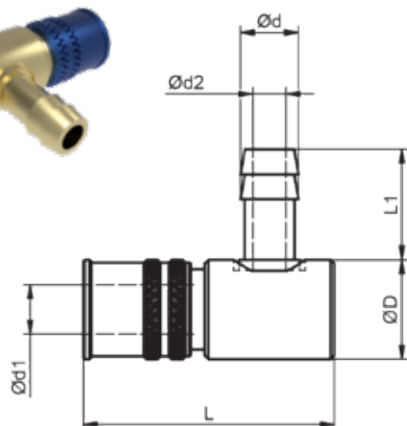


Giunto ECO con tubo a 90° compatibilità standard

- ECO coupling with 90° tube standard compatibility
- ECO-Kupplung mit 90°-Rohr Standardkompatibilität
- ECO couplage avec tube à 90° compatibilité standard
- Enchufe ECO con tubo de 90° compatibilidad estándar

CODICE/CODE	MODEL	D	d1	L	d	d2	L1	L2	PEZZI/PIECES
QE90SDT0611	TYPE 6	19	9,5	48,5	10,7	6	20	44,5	1
QE90SDT0913	TYPE 9	25	13,5	54	14	10	24,5	56	1

QS 40D

NEW

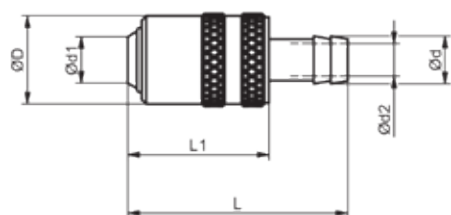


Giunto SAFETY diritto con tubo compatibilità DME

- SAFETY straight coupling with DME compatibility tube
- SAFETY gerade Kupplung mit DME-Kompatibilitätsrohr
- SAFETY couplage avec tube de compatibilité DME
- Enchufe recto SAFETY con tubo de compatibilidad DME

CODICE/CODE	MODEL	D	d1	d2	d	L1	L	PEZZI/PIECES
QS40D0611	TYPE 6	19	9	7	10,3	17	47,5	1
QS40D0913	TYPE 9	25	13,5	10	14	24,5	59	1

QS 20D

NEW

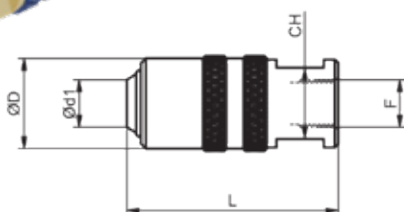


Giunto SAFETY filettato femmina compatibilità DME

- SAFETY female threaded coupling DME compatibility
- SAFETY-Kupplung mit Innengewinde DME-Kompatibilität
- SAFETY couplage fileté femelle compatibilité DME
- Enchufe SAFETY roscado hembra compatibilidad DME

CODICE/CODE	MODEL	F	D	d1	L	CH	PEZZI/PIECES
QS20D0618	TYPE 6	G1/8	19	9,5	44,5	15	1
QS20D0614	TYPE 6	G1/4	19	9,5	44,5	15	1
QS20D0914	TYPE 9	G1/4	25	13,5	48,5	19	1
QS20D0938	TYPE 9	G3/8	25	13,5	48,5	19	1

QS 10D

NEW

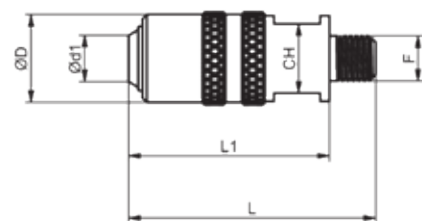


Giunto SAFETY filettato maschio compatibilità DME

- SAFETY male threaded coupling DME compatibility
- SAFETY-Außengewindekupplung DME-Kompatibilität
- SAFETY couplage fileté mâle compatibilité DME
- Enchufe SAFETY roscado macho compatibilidad DME

CODICE/CODE	MODEL	F	D	d1	L1	L	CH	PEZZI/PIECES
QS10D0618	TYPE 6	G1/8	19	9,5	44,5	47,5	15	1
QS10D0614	TYPE 6	G1/4	19	9,5	44,5	47,5	15	1
QS10D0938	TYPE 9	G3/8	25	13,5	48,5	56	19	1
QS10D0912	TYPE 9	G1/2	25	13,5	48,5	56	19	1

QS 45D

NEW

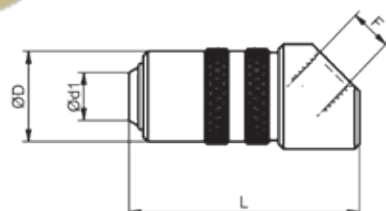


Giunto SAFETY filettato femmina a 45° compatibilità DME

- SAFETY 45° female threaded coupling DME compatibility
- SAFETY 45°-Innengewindekupplung DME-Kompatibilität
- SAFETY couplage fileté femelle à 45° compatibilité DME
- Enchufe SAFETY roscado hembra de 45° compatibilidad DME

CODICE/CODE	MODEL	F	D	d1	L	PEZZI/PIECES
QS45D0618	TYPE 6	G1/8	19	9,5	48,5	1
QS45D0914	TYPE 9	G1/4	25	13,5	51	1

QS 90D

NEW

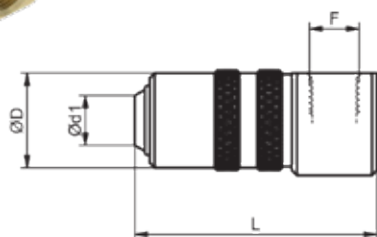

Giunto SAFETY filettato femmina a 90° compatibilità DME

SAFETY 90° female threaded coupling DME compatibility

SAFETY 90°-Kupplung mit Innengewinde DME-kompatibel


SAFETY couplage fileté femelle à 90° compatibilité DME

Enchufe SAFETY roscado hembra de 90° compatibilidad DME

CODICE/CODE	MODEL	F	D	d1	L	PEZZI/PIECES
QS90D0618	TYPE 6	G1/8	19	9,5	48,5	1
QS90D0914	TYPE 9	G1/4	25	13,5	51	1

QS 45DT

NEW

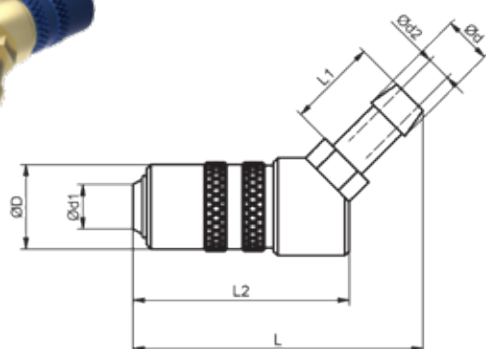

Giunto SAFETY con tubo a 45° compatibilità DME

SAFETY coupling with 45° tube DME compatibility

SAFETY-Kupplung mit 45°-Rohr DME-Kompatibilität


SAFETY couplage avec tube à 45° compatibilité DME

Enchufe SAFETY con tubo de 45° compatibilidad DME

CODICE/CODE	MODEL	D	d1	L	L2	d	d2	L1	PEZZI/PIECES
QS45DT0611	TYPE 6	19	9,5	65	48,5	10,7	6	20	1
QS45DT0913	TYPE 9	25	13,5	68	54	14	10	24,5	1

QS 90DT

NEW

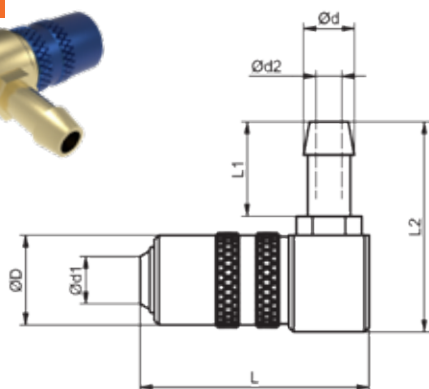

Giunto SAFETY con tubo a 90° compatibilità DME

SAFETY coupling with 90° tube DME compatibility

SAFETY-Kupplung mit 90°-Rohr DME-Kompatibilität


SAFETY couplage avec tube à 90° compatibilité DME

Enchufe SAFETY con tubo de 90° compatibilidad DME

CODICE/CODE	MODEL	D	d1	L	d	d2	L1	L2	PEZZI/PIECES
QS90DT0611	TYPE 6	19	9,5	48,5	10,7	6	20	44,5	1
QS90DT0913	TYPE 9	25	13,5	54	14	10	24,5	56	1

QS 60

NEW

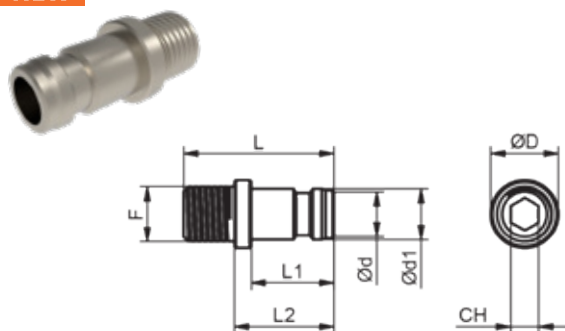


Innesto maschio compatibilità standard

- Male connection standard compatibility
- Kupplungen mit Standardkompatibilität
- Embout mâle avec compatibilité standard
- Adaptador macho con compatibilidad estándar

CODICE/CODE	MODEL	F	D	d	d1	L	L1	L2	CH	PEZZI/PIECES
QS601806	TYPE 6	G1/8	12	6	9	26,7	14,7	17,7	5	1
QS601006	TYPE 6	M10X1,5	12	6	9	26,7	14,7	17,7	5	1
QS601406	TYPE 6	G1/4	16	6	9	26,7	14,7	17,7	5	1
QS601809	TYPE 9	G1/8	16	9	13,5	29	13,7	18,7	5	1
QS601409	TYPE 9	G1/4	16	9	13,5	29	13,7	18,7	8	1
QS603809	TYPE 9	G3/8	18	9	13,5	29	13,7	18,7	8	1

QS 70

NEW

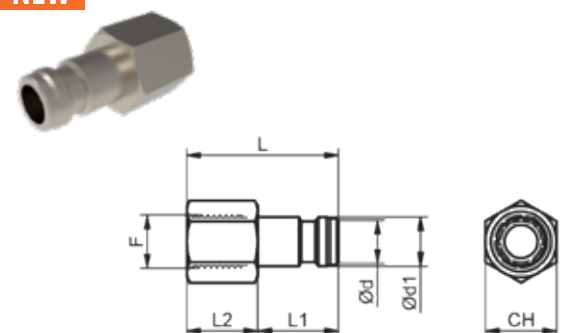


Innesto femmina compatibilità standard

- Female connection standard compatibility
- Kupplungen mit Standardkompatibilität
- Embout femelle avec compatibilité standard
- Adaptador hembra con compatibilidad estándar

CODICE/CODE	MODEL	F	d	d1	L	L1	L2	CH	PEZZI/PIECES
QS701806	TYPE 6	G1/8	6	9	28	14,5	13,5	13	1
QS701406	TYPE 6	G1/4	6	9	32	14,5	14,5	15	1
QS701809	TYPE 9	G1/8	9	13,5	30	13,7	16,3	15	1
QS701409	TYPE 9	G1/4	9	13,5	30	13,7	16,3	15	1
QS703809	TYPE 9	G3/8	9	13,5	32	13,7	16,3	19	1

QS 90

NEW

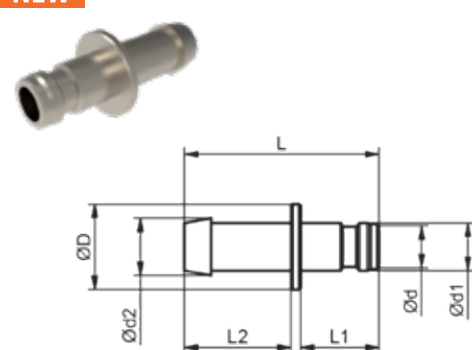


Innesto con resca compatibilità standard

- Connection with tail standard compatibility
- Kupplungen mit Abschluss mit Standardkompatibilität
- Embout barbillon avec compatibilité standard
- Adaptador con espiga con compatibilidad estándar

CODICE/CODE	MODEL	D	L	L1	L2	d	d1	d2	PEZZI/PIECES
QS900611	TYPE 6	16	36,5	14,7	20	6	9	10,7	1
QS900913	TYPE 6	19	40	13,5	24,5	9	13,5	13,9	1

QS 60X

NEW

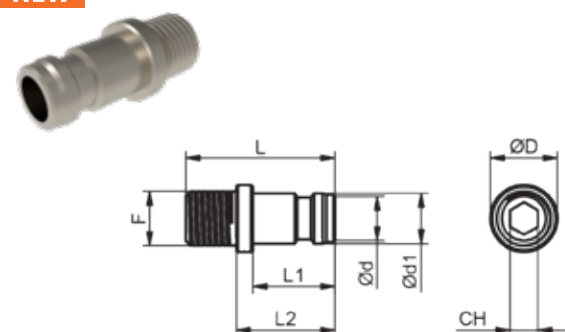


Innesto maschio compatibilità standard AISI303

- Male connection standard compatibility AISI303
- Kupplungen mit Standardkompatibilität AISI303
- Embout mâle avec compatibilité standard AISI303
- Adaptador macho con compatibilidad estándar AISI303

CODICE/CODE	MODEL	F	D	d	d1	L	L1	L2	CH	PEZZI/PIECES
QS601806X	TYPE 6	G1/8	12	6	9	26,7	14,7	17,7	5	1
QS601006X	TYPE 6	M10X1,5	12	6	9	26,7	14,7	17,7	5	1
QS601406X	TYPE 6	G1/4	16	6	9	26,7	14,7	17,7	5	1
QS601809X	TYPE 9	G1/8	16	9	13,5	29	13,7	18,7	5	1
QS601409X	TYPE 9	G1/4	16	9	13,5	29	13,7	18,7	8	1
QS603809X	TYPE 9	G3/8	18	9	13,5	29	13,7	18,7	8	1

QD 60

NEW

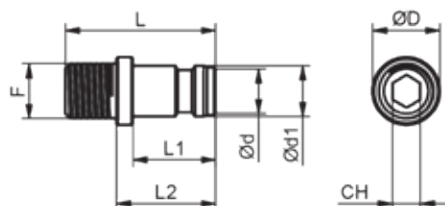


Innesto maschio compatibilità DME

- Male connection DME compatibility
- Kupplungen mit DME-Kompatibilität
- Embout mâle avec compatibilité DME
- Adaptador macho con compatibilidad DME

CODICE/CODE	MODEL	F	D	d	d1	L	L1	L2	CH	PEZZI/PIECES
QD601806	TYPE 6	G1/8	12	6,5	9,5	22	10,5	12	5	1
QD601006	TYPE 6	M10X1,5	12	6,5	9,5	22	10,5	12	5	1
QD601406	TYPE 6	G1/4	16	6,5	9,5	22	10,5	12	5	1
QD601809	TYPE 9	G1/8	16	9,5	13,5	29	15,5	18,7	5	1
QD601409	TYPE 9	G1/4	16	9,5	13,5	29	15,5	18,7	8	1
QD603809	TYPE 9	G3/8	18	9,5	13,5	29	15,5	18,7	8	1

QD 70

NEW

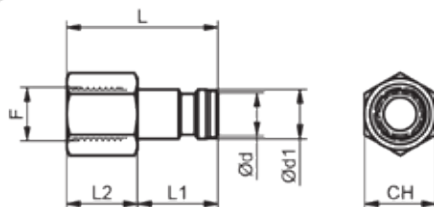


Innesto femmina compatibilità DME

- Female connection DME compatibility
- Kupplungen mit DME-Kompatibilität
- Embout femelle avec compatibilité DME
- Adaptador hembra con compatibilidad DME

CODICE/CODE	MODEL	F	d	d1	L	L1	L2	CH	PEZZI/PIECES
QD701409	TYPE 9	G1/4	9,5	13,5	33,8	15,5	18,3	15	1
QD703809	TYPE 9	G3/8	9,5	13,5	35	15,5	20	19	1

QL 69

NEW

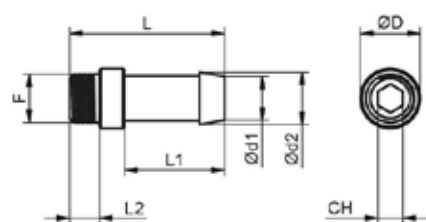

Portagomma maschio cilindrico

- Hose male adapter parallel
- Schlauchtülle zylindrisches Gewinde
- Douille annelée, cylindrique
- Espiga macho, cilíndrica

CODICE/CODE	MODEL	F	D	d1	d2	L	L1	L2	CH	PEZZI/PIECES
QL691806	TYPE 6	G1/8	12	6	10,5	31	20	6	5	1
QL691406	TYPE 6	G1/4	15	6	10,5	31	20	6	5	1
QL691809	TYPE 9	G1/8	16	9	14	37,5	24,5	10	5	1
QL691409	TYPE 9	G1/4	16	9	14	37,5	24,5	10	8	1
QL693809	TYPE 9	G3/8	19	9	14	37,5	24,5	10	8	1